

C71

Build No. 20180105

PROFILE

Centerm C71 is a specialized zero client for PCoIP solution, through which you can achieve unified management of high-end graphics workstation designed to render 3D graphic solutions with the PCoIP host card.

FEATURES

➤ Specialized zero client for PCoIP solution

Excellent performance in 3D graphics, which remedies the shortcomings of CITRIX and RDP solution in 3D applications.

➤ High Performance

Support 1920x1200 high resolution based on the high performance graphic engine and pixel processing core.

➤ High Security

All computing and storage hardware are protected in security center. Only pixels are transmitted to each C71 and all data are still stored securely in data center.

➤ Zero Maintenance

No CPU, no operating system, no storage, fanless, no noise, without need to upgrade the firmware or virus database frequently.

➤ Low TCO solution



Affordable price, lower power consumption which guarantee an economical solution.



Connectivity



VESA Mounting

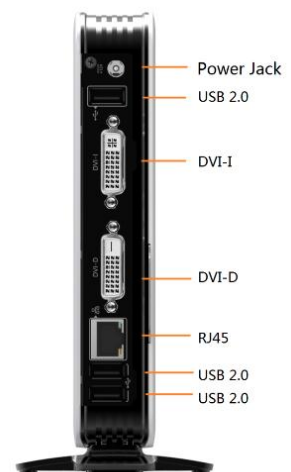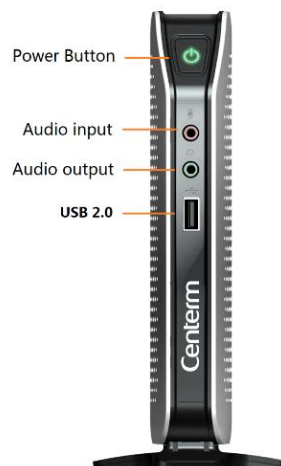

SYSTEM

Processor	Teradici PCoIP 2321 zero client
Available Operating System	N/A
Management	Teradici PCoIP Management Console

MEMORY

RAM (DDR3)	512MB (On board)
------------	------------------

DISPLAY

Port	1x DVI-I port (1 VGA adapter included), 1x DVI-D Port
Resolution	1920x1200 @ 60Hz
Color Depth	24 bits
Dual Display	Supported

NETWORK

LAN	x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
-----	--

I/O PERIPHERAL INTERFACE

USB 2.0	x 3 (rear), x1 (front)
RJ-45	x 1

AUDIO

Ports	Front: Line-out x 1 , Mic-in x 1, (1/8-inch mini jack)
-------	--

DIMENSION

Device (H x W x D)	131mm x 31.5mm x 167mm
Packaging	294mm x 188mm x 67mm
Net Weight	0.55 kg

POWER

Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC
Power Consumption	6.5w

MOUNTING

VESA Bracket	VESA Mounting Kit
Kensington Lock	Built-in Kensington Lock Slot

ENVIRONMENT

Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing